

ITEM NO. 75098
DRAG RACING ALARM CLOCK

DRAG RACING ALARM

with Realistic
Lights & Sounds!

I N S T R U C T I O N S

Important: Please remove battery tab under battery cover prior to setting this clock.

1. Setting Time. Turn Hand Set Knob located on back of clock to proper time. (see fig. 1)

2. Setting Alarm. Turn Alarm Set Knob on back of clock to desired time. (see fig. 1) Switch Alarm Activation Switch to the on position. (see fig. 2) The Drag Racing Alarm Clock is now set. To turn alarm off, switch the Alarm Activation Switch to the off position. Pressing the Snooze/Light bar will provide an additional 5 minutes of rest. (see fig. 2)

Note: Alarm will repeat drag racing sounds and lights until turned off.

3. Light Function. The Drag Racing Alarm Clock is equipped with a lighted dial. Press the Snooze/Light bar and the dial will light for approximately 5 seconds. **Note:** Dial light turns off automatically.

4. Demo Mode. The Drag Racing Alarm Clock comes with a Demo Button to rev the engine anytime. Press the Demo Button located on the front of the clock to see and hear the Drag Racing Alarm Clock come to life. (see fig.2)

5. Temperature & Humidity Gauges.

The gauges are functional.

6. Changing Batteries. Remove battery cover on bottom of clock (see fig. 3). Install 3 "AA" batteries. Replace cover. **Note:** Please be sure to insert batteries with correct polarity (+,-). Always use alkaline batteries for best performance.

Note: Never mix old with new or alkaline and non-alkaline batteries.



Fig. 1

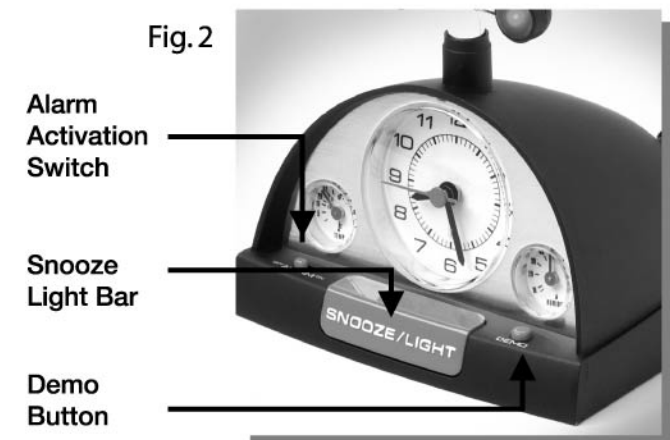


Fig. 2



Fig. 3

 **Feldstein**
& Associates, Inc.

www.mfagifts.com
Maumee, Ohio 43537 800.755.6504

BATTERY NOTICE

Do not mix old and new batteries. Do not mix alkaline, standard (Carbon-Zinc), or rechargeable (Nickel Cadmium) batteries.

Country of Origin: China